

3.5 DX 450/451 General Purpose Tool




Technical data:

- 3.2 kg
- Cartridge 6.8/11M, black, red, yellow, green
- Power regulation
- 380 Nm maximum energy with black cartridge
- noise absorber
- 8 mm equipment available

DX 450 with Standard 12 mm equipment for fastener types:

- ENKK20
- ENP2K-20 S12
- ENK
- NK (→ NK72)
- X-CR 14 D12
- X-CR __ S12
- EM6/EW6/EM7/EF7-__-__ P12
- M6/W6/M7/F7-__-__ D12
- EM8/EW8-__-__ P12
- M8-__-__ D12
- EM10/EW10-__-__ P12
- M10-__-__ D12
- X-CRM8-15-12 P12

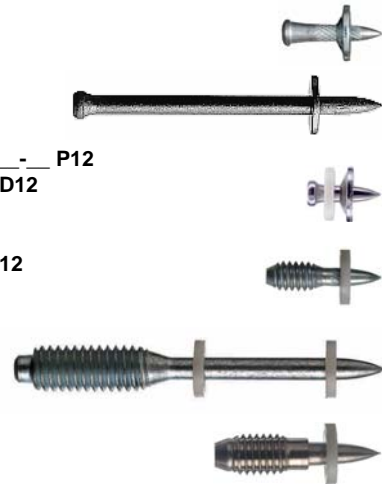

Technical data:

- 3.4 kg
- Cartridge 6.8/11M, black, red, yellow, green, white
- Power regulation
- 380 Nm maximum energy with black cartridge
- noise absorber

DX 450 with grating equipment

- EM8-15-14 P12

- X-CRM8-15-12 P12



Technical data:

- 3.4 kg
- Cartridge 6.8/11M, black, red, yellow, green, white
- Power regulation
- 380 Nm maximum energy with black cartridge
- noise absorber

DX 450 with long equipment

- Same as for standard equipment +
- NK (→ NK117)

- M6-8-52 D12, M6-8-72 D12, M6-8-95 D12 (for early strength of shotcrete test)



DX 451 Tool

- Not shown here, appearance similar to DX 450
- Available with 8, 10 and 12 mm equipment
- Not available in all countries